

RUBBER DAMPER

ACC-5055

Nat. Freq. 8 - 25 Hz




APPLICATIONS

Rubber Damper to support rotating equipment with speed above 800 rpm, fans, engines, pumps, air conditioning, compressors, etc.

DESCRIPTION

- Galvanized metal body, also available in stainless steel.
- Elastic material: Natural rubber.
- Assembly by flange and safety washer for safety against a break .
- Available hardness 45, 60 y 75 shore.
- Weight: 0,05 - 0,50 kg.
- Structural strength 8 G, depending on the static load.
- Working temperature silicone dampers -60°C - 280°C .

DIMENSIONS

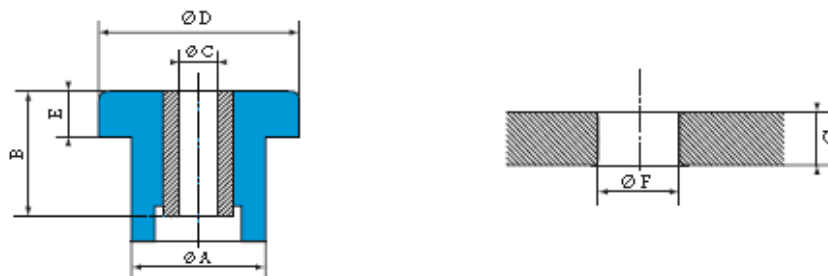

Part	A (mm)	B (mm)	C (mm))	D (mm)	E (mm)	F (mm)	G (mm)	Stiffness 45 IRHD		Stiffness 60-75 IRHD	
								(daN)	(mm)	(daN)	(mm)
ACC-5055-01	20,6	17,5	10	27,7	5,6	20,6	8	8-38	0,8	10-55	0,8
ACC-5055-02	31,5	25,4	13	44,5	10,4	31,5	10	15-82	1,3	20-105	1,3
ACC-5055-03	34,3	35	13	50,8	13,5	34,3	16	35-155	1,3	75-335	1,3
ACC-5055-04	41,1	44,5	16	63,5	15,7	41,1	19	60-260	2,2	125-510	2,2
ACC-5055-05	38	23	16	64	16	38,5	19	100-415	2,2	250-1020	1,2
ACC-5055-06	56,6	50,8	20	95	25,4	56	20	175-715	3,2	250-1020	3,2

