

SPRING DAMPERS ACC-3020

Frec. 3 a 5 Hz.




APPLICATIONS

Damper of low frequency for isolation equipments from 200 rpm , fans, engines, pumps, air conditioning, compressors, etc.

DESCRIPTION

- Metal plates in galvanized steel.
- Spring in special Steel for infinite life, black epoxi painture for long life.
- Internal cushion in stainless Steel for damping.
- Frecuencia natural horizontal around 75% of vertical)
- Weight: 1,1 - 1,7 kg, regarding dimension.
- Maximum dynamic load: 4 g vertical 0,5 g horizontal.

DIMENSIONAL CHARACTERISTICS

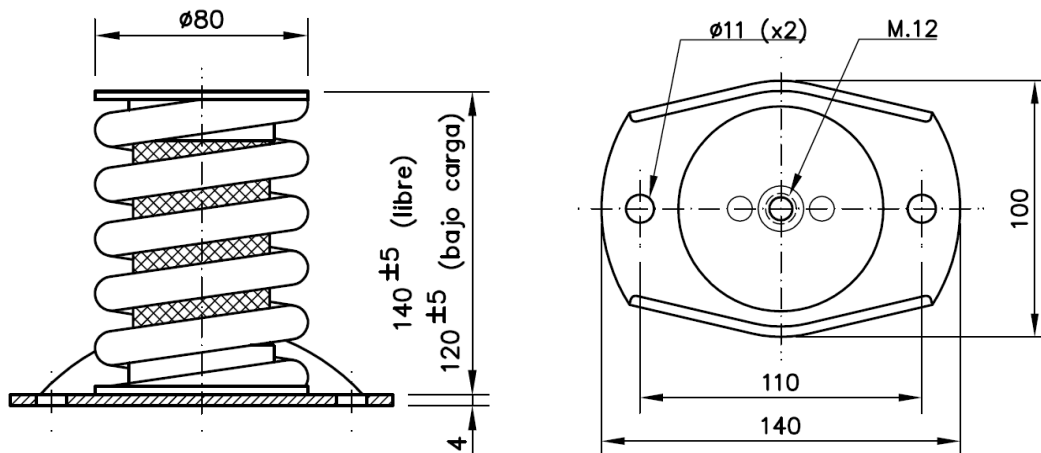


Type	Load (daN)
ACC-3020-01	70-110
ACC-3020-02	110-135
ACC-3020-03	135-170
ACC-3020-04	170-230
ACC-3020-05	220-320
ACC-3020-06	320-420
ACC-3020-07	420-560
ACC-3020-08	550-850

AMORTIGUADORES DE MUELLE

ACC-3020

SPRING COMBINATIONS

The number of springs could be different for higher loads than the capacity of one spring, could be until 40 spring in one plate, for higher or few space we've bigger springs.

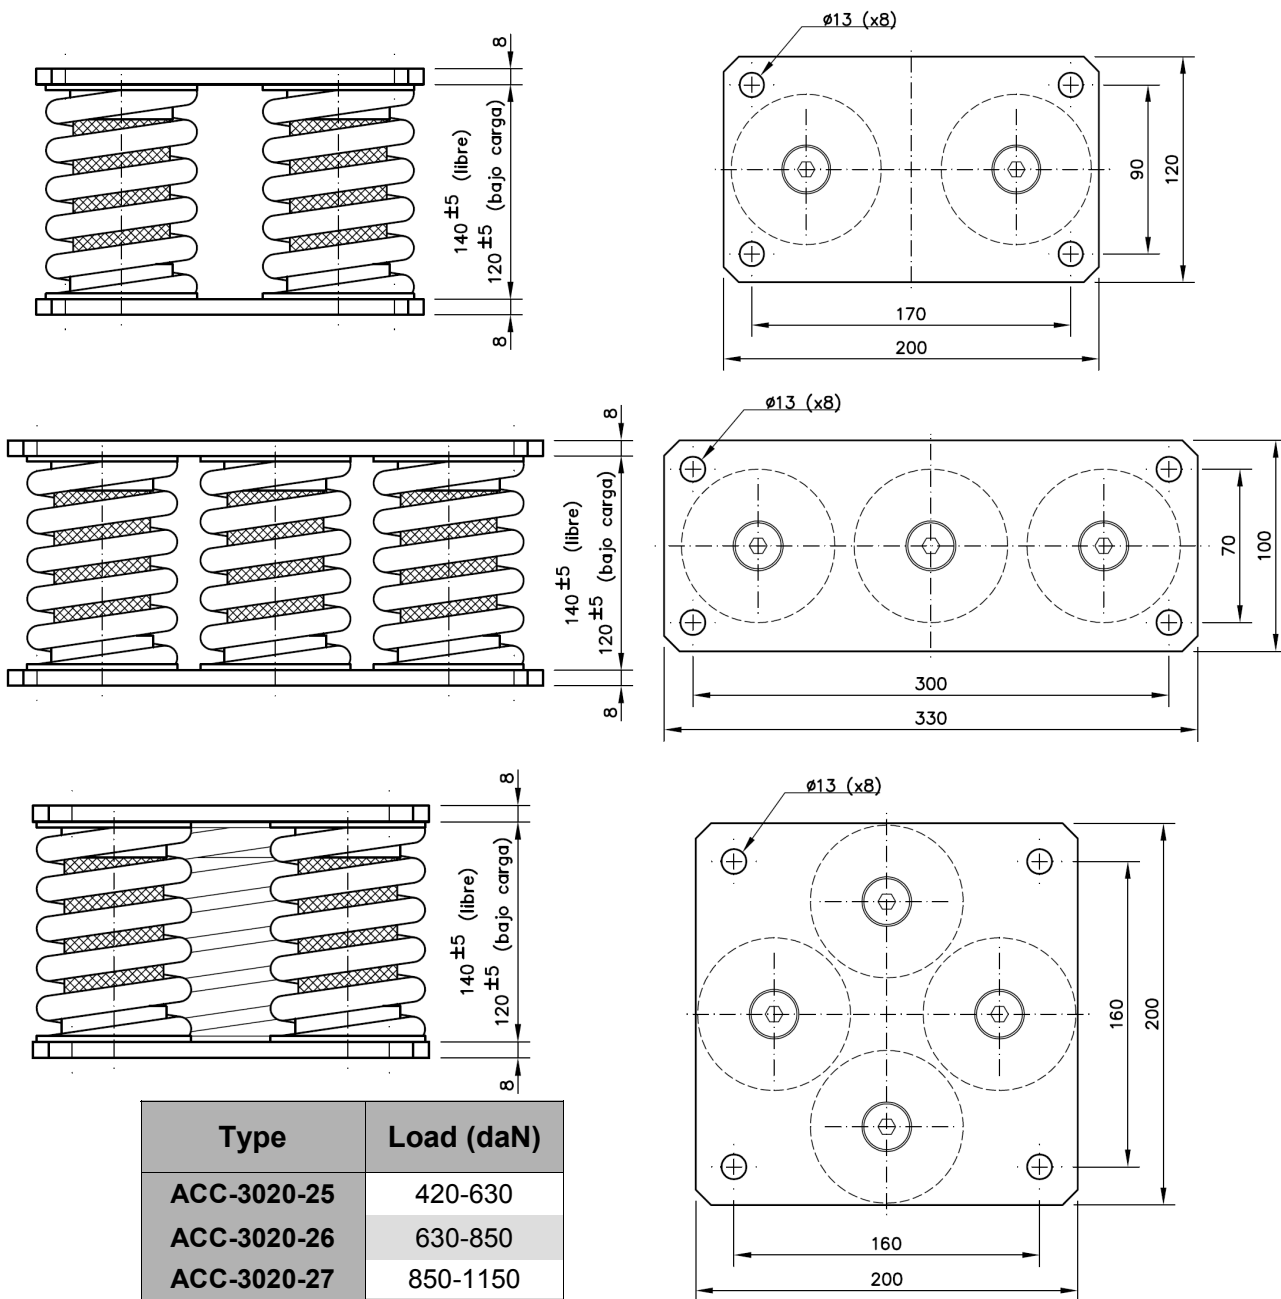

Type	Load (daN)
ACC-3020-25	420-630
ACC-3020-26	630-850
ACC-3020-27	850-1150
ACC-3020-28	1100-1700
ACC-3020-38	1650-2550
ACC-3020-48	2200-3400
ACC-3020-58	2750-4300
ACC-3020-68	3300-5100
ACC-3020-88	4950-6800