

RUBBER DAMPER ACC-5025

Natural Frequency: 15 to 25 Hz.




APPLICATIONS

Rubber damper for the suspension of machines with speeds from 1000 rpm, fan motors, pumps, air conditioning, compressors, etc.


DESCRIPTION

- Metal elements in zincated steel, even stainless.
- Elastic material of natural rubber, NBR, silicone, etc.
- Bell splash guard.
- Hardness of 45, 60 and 75 shore.
- Weight: 0.8 to 7 kg, depending on model.

DIMENSIONAL FEATURES

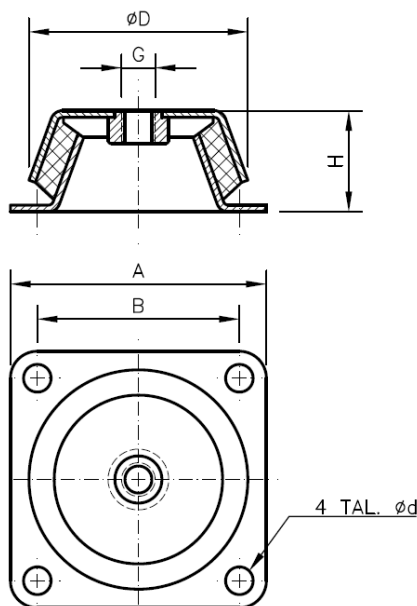

SUFIJO REF. -CU

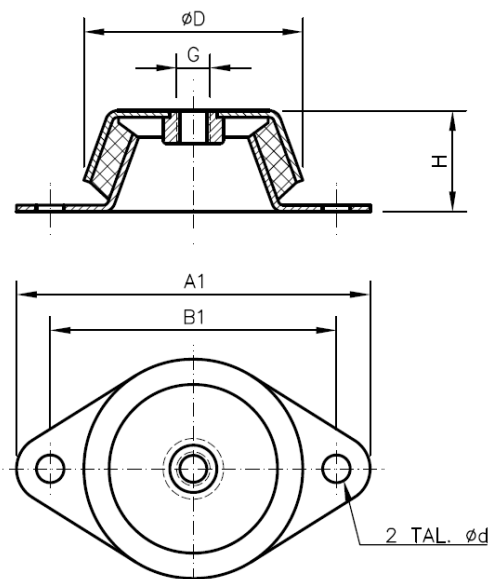

SUFIJO REF. -OV

Part	D (mm)	H (mm)	G	d (mm)	A-A1 (mm)	B-B1 (mm)	Rigidity 45 IRHD		Rigidity 60 IRHD		Rigidity 70 IRHD	
							(daN)	(mm)	(daN)	(mm)	(daN)	(mm)
ACC-5025-01	65	30	M10	8	68/98	55/85	5-40	3,5	100-200	5	150-260	6
ACC-5025-02	94	45	M12	10	97/127	80/110	35-180	3	200-300	4,5	250-380	5,5
ACC-5025-03	110	39	M12	12	122/162	100/140	90-250	4	300-400	3,5	350-490	5
ACC-5025-04	162	60	M16	14	170/225	145/200	190-300	3,8	400-1000	7	800-1200	7
ACC-5025-05	162	60	M16	14	170/225	145/200	260-450	4	800-1400	7,5	900-1800	8