

RUBBER DAMPER - CONICAL

ACC-5040

Nat. Freq. 6 - 10 Hz.




APPLICATIONS

Rubber damper to support pumps, engines, electronic equipment, etc. It can also isolate small shocks.

DESCRIPTION

- Sticked over a metal base, they assure a good dynamic behaviour due to their medium frequency as well as their good shock response.
- Elastic element: natural rubber.
- Natural Frequency:
 - Axial: 6 a 10 Hz (depending on the weight)
 - Maximum displacement with dynamic loads (shock): axial: 3 - 50 mm (depending on the model).
- Weight: 0,40 kg up to 3 kg.

DIMENSIONS

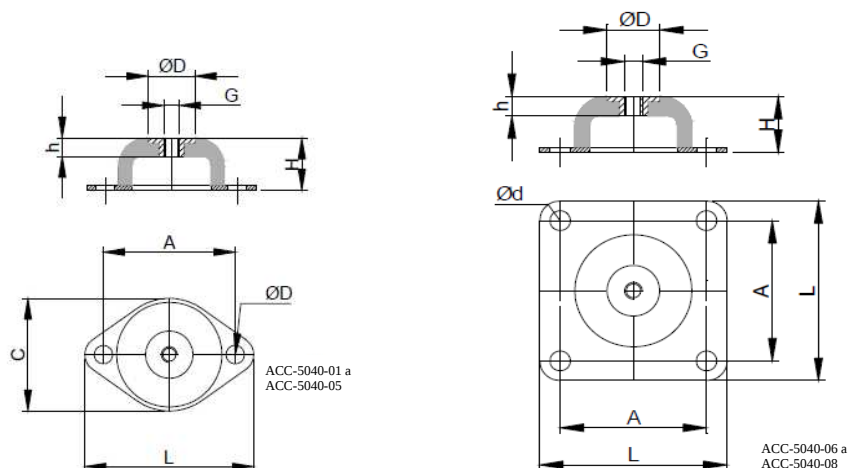

Part	A (mm)	C (mm)	L (mm)	H (mm)	h (mm)	D (mm)	d (mm)	M	Load Sh 40 (daN)	Load Sh 60 (daN)	max. dipl. load Sh 40 (mm)	max. dipl. load Sh 60 (mm)
ACC-5040-01	50	43	64	20	7	18	7	M6	0,5-3,5	5-9	2.5	3
ACC-5040-02	66	56	85	25	11	33	8	M8	3,5-20	9-50	4.5	3.6
ACC-5040-03	92	76	114	35	14	45	10	M10	20-40	50-80	6.5	4.5
ACC-5040-04	110	96	136	40	15	53	11,5	M10	40-70	80-150	14	8.5
ACC-5040-05	124	101	151	45	13	58	11,5	M10	70-130	150-220	9	7
ACC-5040-06	120	-	150	63	18	78	14,5	M12	130-280	220-500	13.8	13
ACC-5040-07	160	-	200	85	25	100	14,5	M16	280-380	500-750	13	15
ACC-5040-08	250	-	310	160	43	186	18	M24	380-1400	750-2500	50	40