

## RUBBER DAMPER - MARINE

ACC-5160




### APPLICATIONS

Rubber Damper to support rotating equipment with speed above 800 rpm, fans, engines, pumps, air conditioning, compressors, etc. These dampers have a high dynamic load capability due to sea conditions, etc.


### DESCRIPTION

- Galvanized Steel base, treatment for saline environment.
- Elastic material: natural rubber as standard, also silicone, NBR, neoprene, etc.

### DIMENSIONS

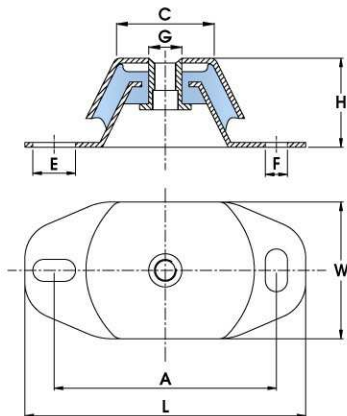

**ACC-5160-01 - 03**

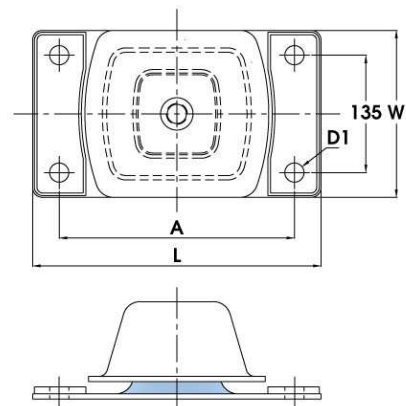

**ACC-5160-04**

| Part        | A   | L   | W   | C   | E     | F     | G   | H   | Load at 45 shore (daN) | Load at 55 shore (daN) | Load a 70 shore (daN) |
|-------------|-----|-----|-----|-----|-------|-------|-----|-----|------------------------|------------------------|-----------------------|
| ACC-5160-01 | 100 | 120 | 60  | 60  | 11x14 | 11x14 | M12 | 40  | 50                     | 65                     | 100                   |
| ACC-5160-02 | 140 | 183 | 75  | 75  | 20x13 | 13x30 | M16 | 50  | 210                    | 300                    | 450                   |
| ACC-5160-03 | 182 | 230 | 112 | 80  | 25x18 | 18x33 | M20 | 70  | 520                    | 800                    | 1000                  |
| ACC-5160-04 | 270 | 330 | 190 | 135 | 22    | 22    | M24 | 112 | 650                    | 950                    | 1600                  |