

METAL DAMPER ACC-9050

Nat. Freq. 8-20 Hz




APPLICATIONS

Resilient dampers for engines, pumps, generators, exhaust, medium frequency rotating equipment, marine, industrial and defence uses.

DESCRIPTION

- Cast Iron Housing, powder coating and phosphate (KTL).
- Carbon Steel threaded shaft, powder coating and phosphate (KTL).
- External retaining ring DIN 471 Metric.
- Stainless steel mesh cushions, 5% damping.
- Ability to withstand high static and dynamic loads.
- High stability and good mechanical properties.
- Almost no ageing.

DIMENSIONAL FEATURES

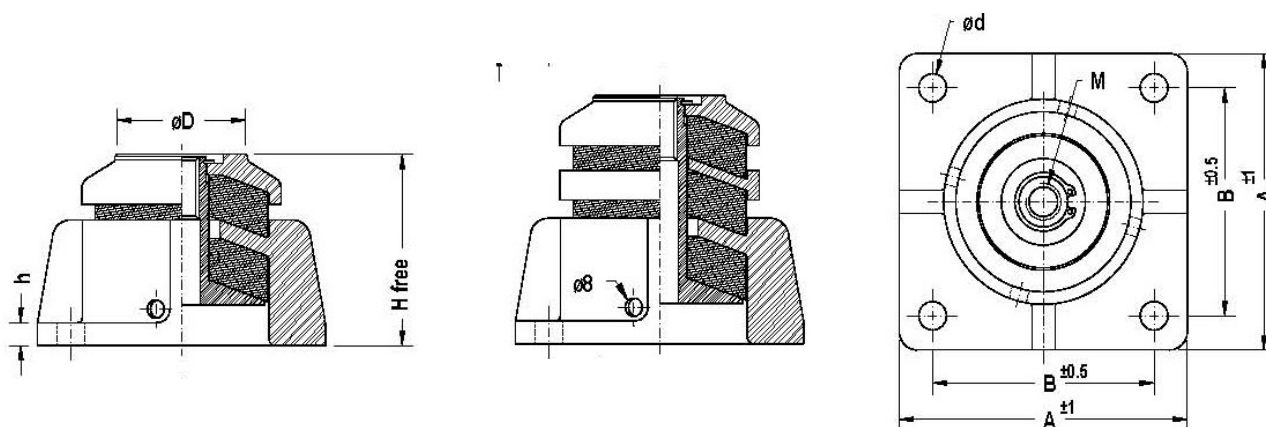

Part	Dimensions (mm)							Load (daN)		Frequency (Hz)	Weight (Kg)
	A	B	ØD	Ød	H	h	M	static	dynamic		
ACC-9050-01	80	64	35	8.2	50	6	M12	5-60	200	15-20	0.7
ACC-9050-02	80	64	35	8.2	50	6	M12	50-250	500	15-20	0.7
ACC-9050-03	80	64	35	8.2	75	6	M12	5-60	200	8-10	0.8
ACC-9050-04	80	64	35	8.2	75	6	M12	50-250	500	8-10	0.8
ACC-9050-05	100	70	52	12.5	71	8	M16	50-900	3500	15-20	1.4
ACC-9050-06	100	70	52	12.5	94	8	M16	50-900	3500	11-15	1.7
ACC-9050-07	130	100	58	12.5	84	10	M16	250-1500	3500	15-20	3.1
ACC-9050-08	130	100	58	12.5	109	10	M16	250-1500	3500	11-15	3.7