

METAL DAMPER WITH CUSHION FOR MACHINERY ACC-8100

Nat. Freq. 12 - 30 Hz.




APPLICATIONS

Damper with Metal Stainless Steel mesh cushion, to isolate vibrations. Exhaust pipelines, rotating equipment, pumps, fans, etc. It can work up to 700°C.

DESCRIPTION

- High load capability.
- High dynamic load capability.
- Almost no aging.
- Elastic Material: Stainless Steel.
- Special arrangements and lower Nat. Freq. upon request.

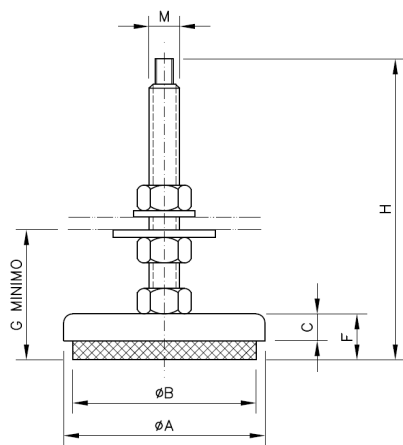

LEVELLING DAMPER WITH 8 NUT AND 8 WASHER

"T" DAMPER WITH ARTICULATED SCREW

Part	Dimensions (mm)				Load (daN)	Max. dynamic (daN)	Nat. Freq. (Hz)
	Ø D1	Ø D2	H1	H2			
ACC-8100-01	82	95	20	35	40-400	800	22-30
ACC-8100-02	82	95	32	47	40-400	800	15-22
ACC-8100-03	82	95	20	35	150-1400	4200	22-30
ACC-8100-04	82	95	32	47	150-1400	4200	15-22
ACC-8100-05	130	150	26	45	700-2700	8200	22-30
ACC-8100-06	130	150	36	55	700-2700	8200	15-22
ACC-8100-07	170	190	35	60	1900-5100	15200	22-30
ACC-8100-08	170	190	44	72	1900-5100	15200	15-22